

# CLD FenceSafe Dulok Lite



On-ground/temporary multi-purpose double wire panel system

CLD FenceSafe Dulok Lite offers a traditional general purpose wire fenceline in an on-ground, temporary format and sustainable format.

Manufactured from twin 6mm horizontal wires, either side of 5mm diameter vertical wires, Dulok Lite is a durable and low maintenance general purpose fence system

Panels are fixed to steel posts using metal clips which are secured in place with pin hex screws for added security.


Installed using CLD's unique FenceSafe Base, made from 100% recycled plastic and 90% recycled UK and European steel, both elements of the system can be used over and over again.



## Conforms to



## Isometric View

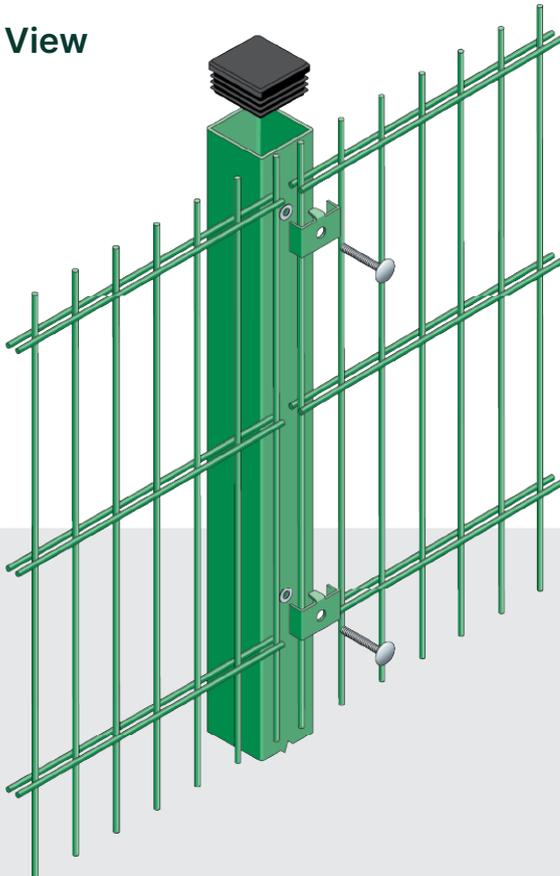

## Key Features

Steel mesh fencing in temporary/on-ground format

Reusable base and panels

Anti-vandal fasteners

Scan the QR code to find out more



# CLD FenceSafe Dulok Lite



On-ground/temporary multi-purpose double wire panel system

## Product Technical Information

<b>Standards:</b>	BS1722-14: 2017 BS EN ISO 1461:2009 BS EN 13438:2013
<b>Panel type:</b>	Mesh and wire. Single vertical and double horizontal wires. Galvanised and powder-coated to minimum 60 microns.
<b>Panel width:</b>	2506mm
<b>Wire diameter:</b>	5mm verticals and 6mm
<b>Mesh size:</b>	200 × 50mm
<b>Height: Select as appropriate</b>	1830mm to 2030mm
<b>Nominal height:</b>	1.8m to 2.4m
<b>Finish:</b>	Polyester powder-coated to minimum 60 microns. Any RAL colour including marine grade and metallics.
<b>Top edge projection:</b>	30mm
<b>Panel installation:</b>	Bottom of panel approximately 40mm above ground
<b>Security topping options:</b>	Cranked or straight extensions for barbed and razor wire
<b>Posts:</b>	RHS, galvanised after manufacture and polyester powder-coated to match fence panel. Mounted onto FenceSafe Base with 47mm x 25mm steel clips.
<b>Post dimensions:</b>	60mm x 60mm to 80mm x 40mm depending on height of panel
<b>Maximum post centres:</b>	2520mm
<b>Fixings:</b>	47mm x 25mm x 3mm steel clips with M8 × 40mm stainless steel pin hex dome-head security screws.
<b>Foundations:</b>	Installation with CLD FenceSafe Base unit, with 4-way adjustable bracket and 200kg of ballast. System to be designed in accordance to BS6399-2 or BS EN 1991 for area of use.
<b>Warranty:</b>	Mesh panel: minimum of 15 years against manufacturing defects.

## Disclaimer

Fencing should be installed in accordance with BS 1722-14. Every care has been taken to ensure that all information provided on this data sheet is accurate. CLD Fencing Systems Ltd reserves the right to change product specification at any time. Please ensure that you have the latest information which can be found on our website or by contacting our team.

Document Reference - 20230118\_CLD\_FenceSafe\_Dulok\_Lite\_DS

CALL 01270 764751 VISIT [WWW.CLD-SYSTEMS.COM](http://WWW.CLD-SYSTEMS.COM)