

CLD LockMaster S2 Auto



Automatic Swing Gates to LPS 1175 B3 (SR2) Issue 8

Minimum of 3 Minutes delay against attack

CLD LockMaster S2 Auto swing gates have been specially designed to blend seamlessly with a CLD Securus fence line. Available using Securus S2 infill panels, LockMaster S2 offers security rated access whilst maintaining aesthetics. This automatic version of our LockMaster gates features a low voltage motor for intensive use.

LockMaster S2 has been tested by the Loss Prevention Certification Board (LPCB) to guarantee a minimum delay of 3 minutes against attack.

See overleaf for technical information.

Ideal for


- CNI sites
- Commercial
- Manufacturing and Logistics
- Data Centres



Conforms to



Isometric View

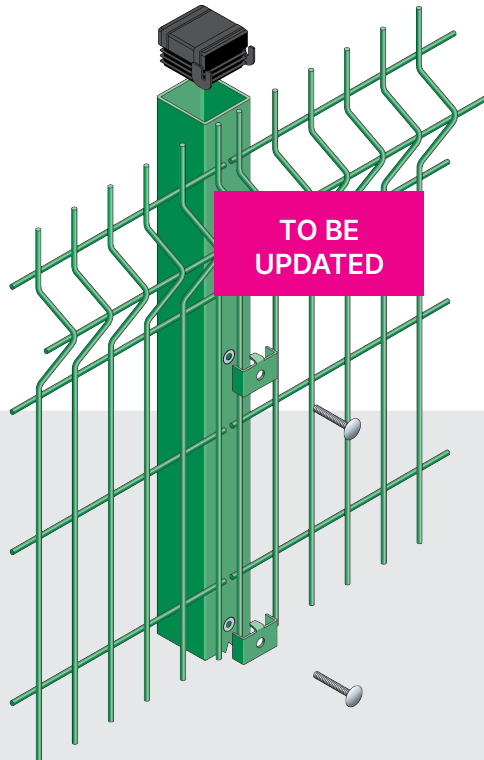

Key Features

Automatic gates

Pairs with the CLD Securus fenceline

Security rated

Double leaf opening

Scan the QR code to find out more



CLD LockMaster S2 Auto



Automatic Swing Gates to LPS 1175 B3 (SR2) Issue 8

Product Technical Information

Standard:	LPS 1175 B3 (SR2) Issue 8 BS1722-14: 2017 BS EN ISO 1461:2009 BS EN 13438:2013 Secured by Design - Police Preferred Specification
Description:	Open mesh steel high security gate system with mesh infill, to match fencing
Configuration:	Double leaf. Inward opening only
Heights:	2440mm to 5000mm to match fence panel
Nominal heights:	2.4m to 5m
Widths:	To suit mesh infill panels: Double leaf: 2400mm to 10000mm maximum
Gate Frame:	To suit mesh infill panels: Vertical stiles: minimum of 50mm x 50mm x 3mm square hollow section & 100mm x 50mm x 3mm rectangular hollow section Horizontal rails: minimum of 50mm x 50mm x 3mm square hollow section & 100mm x 50mm x 3mm rectangular hollow section Galvanised and powder-coated to match fencing
Infill Panels:	CLD Securus S2 (see fencing Q40 specification sheet for further information)
Locking:	GL1 Electromechanical Gate Lock & BFT Giuno Ultra arms
Hinges:	3 x Superhinge 25mm Min
Finish:	Polyester powder-coated to minimum 80 microns. Any RAL colour
Post dimensions:	150mm x 150mm minimum
Foundations:	Post baseplate fixed to suitable concrete foundation 100mm below finished ground level. Note: Contractor/ client is responsible for the foundation size suitable for the ground conditions
Warranty:	Minimum of 15 years against manufacturing defects.

Disclaimer

Fencing should be installed in accordance with BS 1722-14. Every care has been taken to ensure that all information provided on this data sheet is accurate. CLD Fencing Systems Ltd reserves the right to change product specification at any time. Please ensure that you have the latest information which can be found on our website or by contacting our team.

Document Reference - 20230118_CLD_LockMaster_S2_Auto_DS

CALL 01270 764751 VISIT WWW.CLD-SYSTEMS.COM