

CLD Securus AC SR2

High security fencing system to LPS 1175 SR2 Issue 7

Approved for Government Use – contact CPNI for more information




Physical
Security
Systems



Find out more
Scan for more information

Description

Securus is CLD's range of specialist security fencing. Traditionally referred to as prison mesh or 358 mesh, the Securus range has been updated to allow complete flexibility – the panels can be swapped out to change the security rating as the needs of the site change. Securus AC SR2 has been certified by the Loss Prevention Certification Board to provide a minimum of 3 minutes delay against attack.

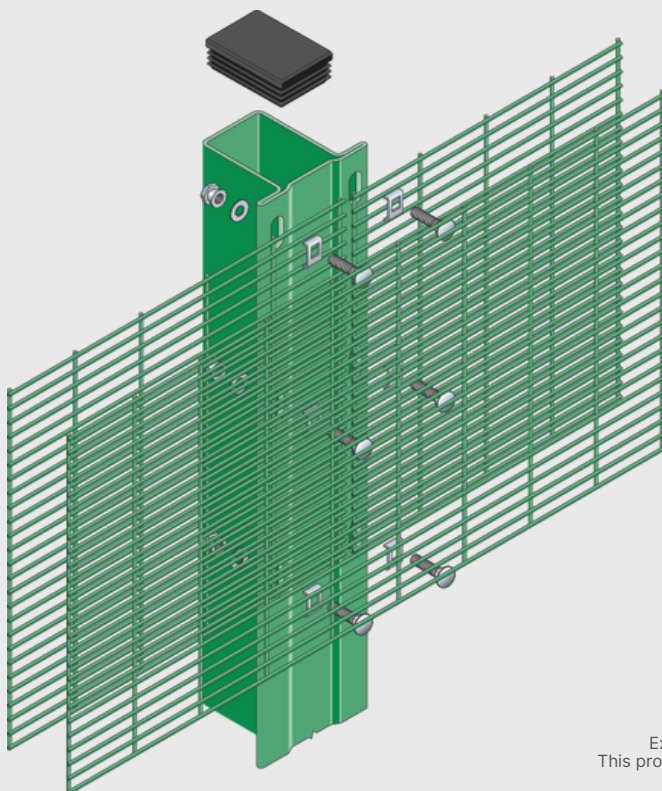

Features

Double layer mesh system

Excellent visibility for CCTV

LPS 1175 SR2 Issue 7
and Secured by Design
accredited

Ideal for Data Centres,
Government sites, Police
Stations, MoD, Ports & Airports,
Utilities

Exploded view of post and fixing details for the CLD Securus AC SR2
This product has additional features not demonstrated for security reasons



National Protective
Security Authority

cld-systems.com

CLD Securus AC SR2

High security fencing system to LPS 1175 SR2 Issue 7

Approved for Government Use – contact CPNI for more information

Product Technical Information

Standard	LPS 1175 SR2 Issue 7 BS1722-14: 2017 BS EN ISO 1461:2009 BS EN 13438:2013 Approved for Government Use. Contact CPNI (the Centre for Protection of National Infrastructure) for more information. Secured by Design - Police Preferred Specification
Panel Type	Mesh and wire. Double layered mesh system. High aluminium content galvanised and powder coated to minimum 80 microns dft. All items supplied loose for site assembly.
Panel Width	2518 mm
Wire Diameter	4mm
Mesh size	76.2 x 12.5 mm mesh
Fixings	120mm x 6mm full length clamp bar. M8 Stainless Steel cup square bolt and Securus clips on main posts
Available Heights	2440mm to 5000mm
Nominal Heights	2.4m to 5m
Finish	Polyester powder-coated to minimum 60 microns. Any RAL colour including marine grade and metallics.
Top Edge Projection	nil
Panel installation	Bottom of panel minimum 300mm below ground, must be assembled on site.
Topping Options	Barbed and razor wire, cranked and straight
Posts	Special flanged post, galvanised after manufacture and polyester powder-coated to match fencing
Post Dimensions	80mm x 60mm
Post Centres	2528mm +/- 9mm
Foundations	Set posts in holes minimum 450mm square x 950mm deep min. Note: Contractor/ client is responsible for the foundation size suitable for the ground conditions and fence height.
Warranty	Minimum of 15 years against manufacturing defects.

Disclaimer

Fencing should be installed in accordance with BS 1722-14. Every care has been taken to ensure that all information provided on this data sheet is accurate. CLD Fencing Systems Ltd reserves the right to change product specification at any time. Please ensure that you have the latest information which can be found on our website or by contacting our team.

Document Reference - CLD_Securus_AC_SR2_DS_20230609