

CLD HoardSafe S1

Site hoarding to LPS 1175 A1 (SR1) Issue 8



Minimum of 60 seconds delay against attack

HoardSafe is CLD's range of sustainable and secure hoarding. Manufactured from composite recycled plastic panels which click easily into place and are installed on steel rails.

HoardSafe S1 is a security rated version which incorporates a Securus steel mesh panel to the rear which has been certified by the Loss Prevention Certification Board to provide a minimum of 60 seconds against attack.

The system can be fixed to blocks or ground buried, transportation and installation.

Ideal for


- Sensitive construction sites requiring high security
- Protecting people in open spaces



Conforms to



Isometric View

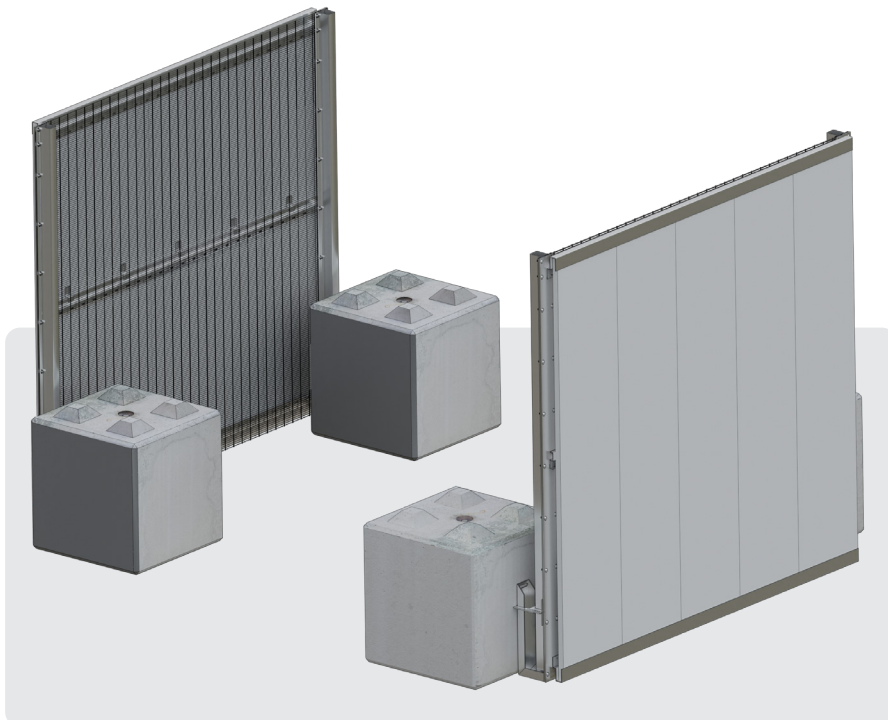

Key Features

Security rated site hoarding

Sustainable alternative to standard hoarding

BS EN 1991 wind loading tested to in excess of 100 mph

Scan the QR code to find out more



CLD HoardSafe S1

Site hoarding to LPS 1175 A1 (SR1) Issue 8



Product Technical Information

Standards: LPS 1175 A1 (SR1) Issue 8 BS EN ISO 1461:2009
BS EN 1991 Wind Loading BS EN 13438:2013
Secured by Design - Police Preferred Specification
TWf2012:01 Temporary Works Forum

Panel Type: 35mm thick recycled PVC board, 500mm wide panels, height to suit
CLD Securus mesh panel to rear

Panel Width: Minimum 500mm

Wire diameter: 4mm minimum

Mesh Size: 76.2mm x 12.5mm

Height: 1806mm to 3006mm

Nominal height: 1.8m up to 3m

Finish: White PVC board as standard. Other RAL single colour options available. Can be vinyl wrapped with custom designs. Top & bottom rails in 3mm pre-galvanised steel, can be polyester powder-coated to minimum 80 microns to any RAL colour.
Mesh panel black RAL 9005 or green RAL 6005 as standard.

Top Edge Projection: n/a

Panel Installation Bottom rail to follow ground level

Security topping options: Options such as anti-climb available on request

Posts: Special flanged post, galvanised after manufacture

Post dimensions: 80mm x 60mm

Maximum post centres: 2520mm

Fixings: M8 cup square bolt with washer & hex nut

Foundations: Post fixed to kentledge block using 4 way adjustable bracket. Ground bury option. Can also be dug in. Set posts in holes minimum of 450mm square x 800mm deep. Note: Contractor/ client is responsible for the foundation size suitable for the ground conditions and height of fence.

Warranty Steel and mesh covered by CLD's warranty - minimum of 15 years against manufacturing defects.

Disclaimer

Fencing should be installed in accordance with BS 1722-14. Every care has been taken to ensure that all information provided on this data sheet is accurate. CLD Fencing Systems Ltd reserves the right to change product specification at any time. Please ensure that you have the latest information which can be found on our website or by contacting our team.

Document Reference - 20221208_CLD_HoardSafe_S1_DS

CALL 01270 764751 VISIT WWW.CLD-SYSTEMS.COM