

CLD FenceSafe Eclipse

On-ground/temporary v-mesh profiled rigid mesh panel



Physical Security Systems

CLD FenceSafe Eclipse offers a cost effective, general purpose v-mesh profiled fence in an on-ground, temporary format and sustainable format. Ideal for construction sites, events and public spaces.

Manufactured from 5mm wire, with projecting spikes, CLD Eclipse offers a good deterrent against vandals and intruders.


Installed using CLD's unique FenceSafe Base, made from 100% recycled plastic and 90% recycled UK and European steel, both elements of the system can be used over and over again.



Conforms to



Isometric View

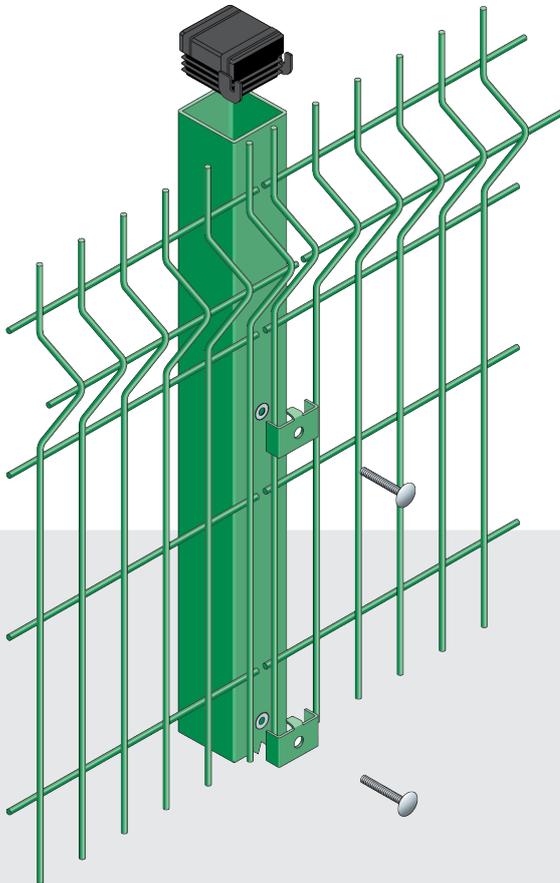

Key Features

Profiled panels

Reusable base and panels

For hire or purchase

Scan the QR code to find out more



CALL 01270 764751 VISIT WWW.CLD-SYSTEMS.COM

CLD FenceSafe Eclipse

On-ground/temporary v-mesh profiled rigid mesh panel



Physical
Security
Systems

Product Technical Information

Standards:	BS1722-14: 2017 BS EN ISO 1461: 2009 BS EN 13438: 2013
Panel type:	Mesh and wire with profiles. Galvanised and powder-coated to minimum 60 microns. Installed using CLD FenceSafe Base
Panel width:	2.5m or 3.0m up to 2.4m high
Wire diameter:	5mm
Mesh size:	200mm x 50mm
Available heights: Select as required	1730mm/1930mm/2330mm
Nominal height:	1.8m/2.0m/2.4m
Finish:	Polyester powder-coated to minimum 60 microns. Any RAL colour including marine grade and metallics.
Top edge projection:	30mm
Panel installation:	Bottom of panel maximum 50mm above ground
Security topping options:	Barbed and razor, cranked or straight
Posts:	SHS galvanised after manufacture and polyester powder-coated to match fencing
Post dimensions:	60mm x 60mm
Maximum post centres:	2510mm or 3010mm
Fixings:	47mm x 35mm steel clips.
Foundations:	Installation using CLD FenceSafe Base unit, with 4-way adjustable bracket and 200kg of ballast. System to be designed in accordance with BS6399-2 or BS EN 1991 for area of use.
Warranty:	Minimum of 15 years against manufacturing defects

Disclaimer

Fencing should be installed in accordance with BS 1722-14. Every care has been taken to ensure that all information provided on this data sheet is accurate. CLD Fencing Systems Ltd reserves the right to change product specification at any time. Please ensure that you have the latest information which can be found on our website or by contacting our team.

Document Reference - 20230118_CLD_FenceSafe_Eclipse_DS

CALL 01270 764751 VISIT WWW.CLD-SYSTEMS.COM